





LA 06 S - TECHNICAL DATA

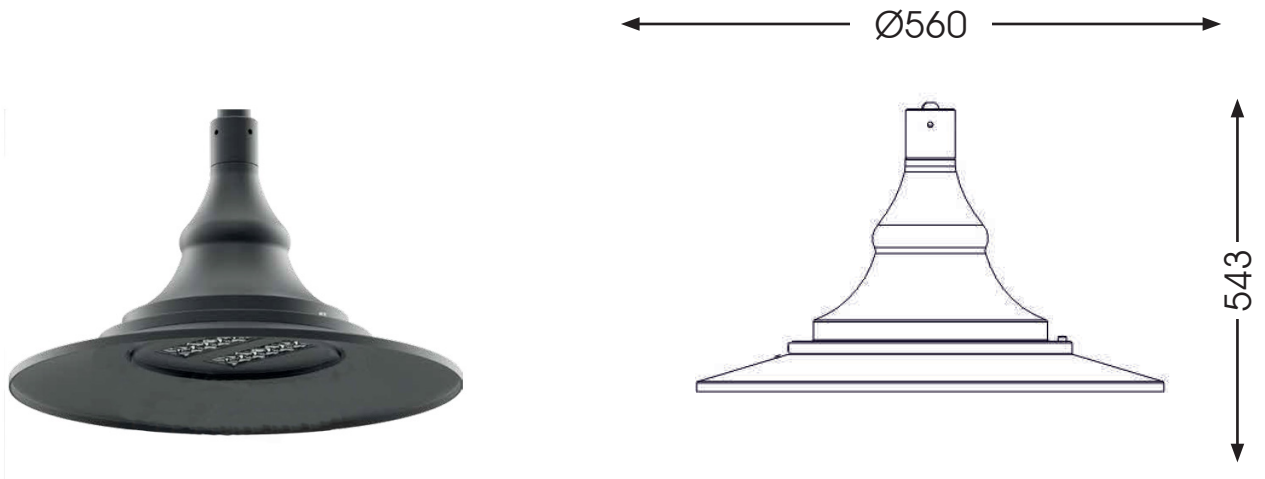

LIGHTING FIXTURE

Artistic lamp in black anodized aluminum with anticorrosive and decorative properties.

The opening / closing of the appliance with a hinge guarantees convenient installation and maintenance.

The overvoltage protection increases the device's resistance to electrical discharges up to 15 pulses with a voltage of 10kV. Mounting on aluminum pole with welded arms with $\varnothing 42 \times 40$ mm ends.

DEGREE OF PROTECTION

IP 66

DIMENSIONS

$\varnothing 560 \times 340$ mm equipped with a suspension connection consisting of a 3/4 threaded sleeve.

WEIGHT

6.5 Kg all included.

TECHNICAL CHARACTERISTICS OF THE LED SYSTEM

Highly efficient Osram 4DIM power supply, constant current and programmable.

Available functions:

- ability to regulate the output current
- programmable time profiles
- temperature control on the module
- regulation of the power of the appliances through the output voltage
- maintaining constant luminous flux over time.

Two interchangeable, waterproof (IP66) LED modules with 12 LEDs and 5 optics (incl.new - VSo symmetrical m).

SYSTEM PERFORMANCE

LED NUMBER	POWER W	TEMP. COLOR °K	FLUX lm	LED EFFICIENCY lm/W
24	28	2700	3150	113
24	28	3500	3250	117
24	28	4000	3800	136
36	40	2700	4300	108
36	40	3500	4550	114
36	40	4000	5350	134
48	55	2700	6150	112
48	55	3500	6500	119
48	55	4000	7500	136
60	67	2700	7100	106
60	67	3500	7450	112
60	67	4000	8800	131
72	79	2700	8250	105
72	79	3500	8700	111
72	79	4000	10200	129

PHOTOMETRIC CURVE

