


LPG 008 POLE - TECHNICAL DATA

1:20 SCALE

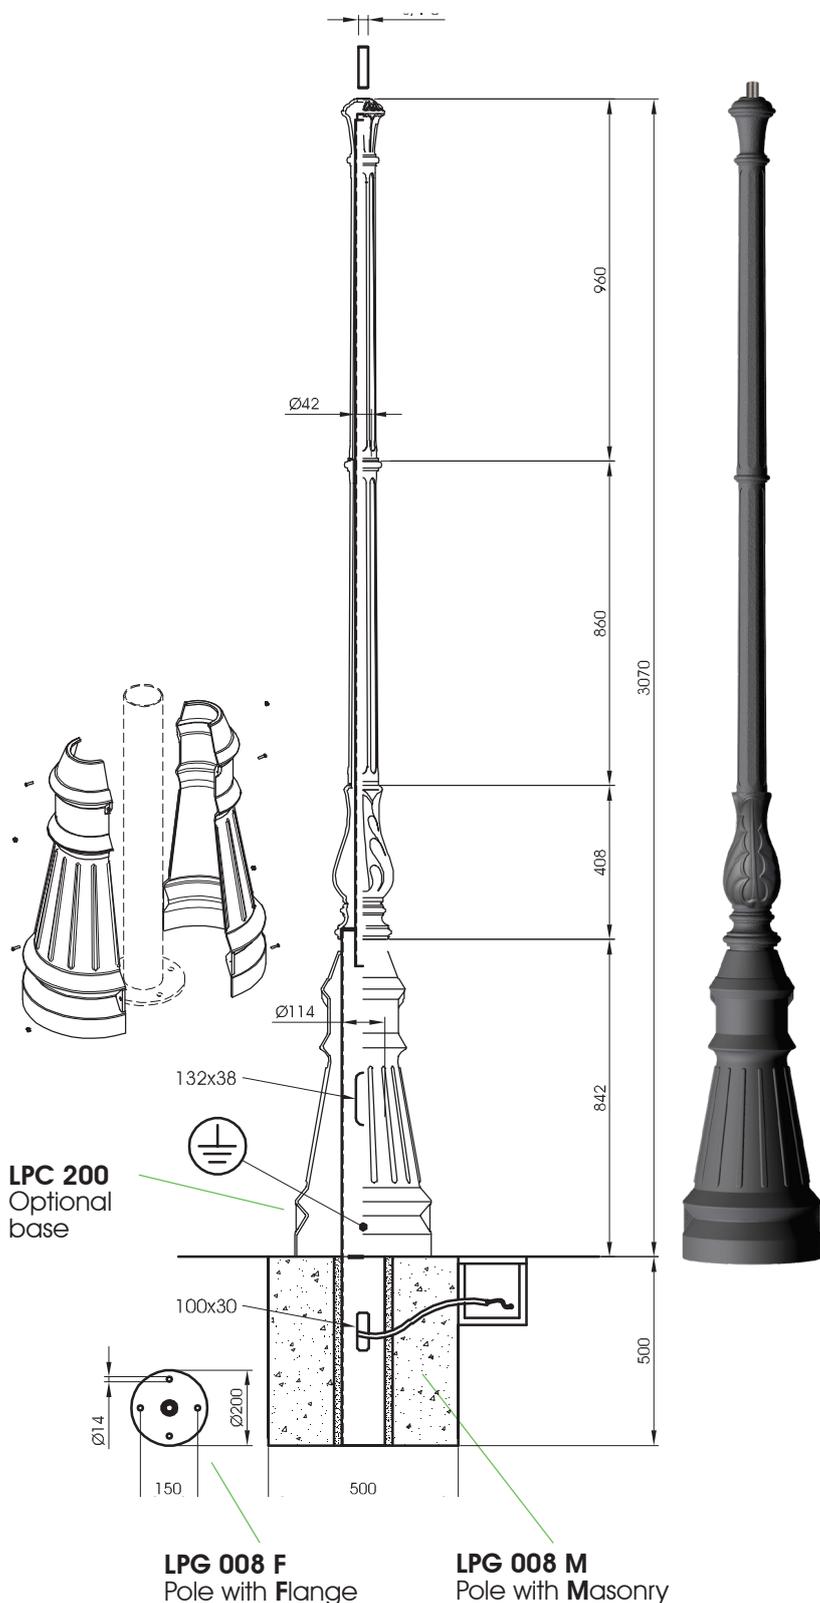

DESCRIPTION

STRUCTURE

Tapered steel core S235JR (UNI EN 10025) Ø114-42 mm hot dip galvanized according to standards (UNI EN ISO 1461).

Cast aluminum base (UNI EN 1706) Ø360 mm.

Decorative leaf in cast iron. GLJ-200 (UNI EN 1561) Ø160 mm.

Column made of cast iron GLJ-200 (UNI EN 1561).

Column with cast iron capital. GLJ-200 (UNI EN 1561).

Threaded $\frac{3}{4}$ end sleeve in steel. cold-dip galvanized.

Stainless steel hardware.

For details on the two types of ground anchorage, refer to the technical drawing.

PAINTING CYCLE

CAST IRON

Sandblasting, immersion coat of zinc monocomponent, coat of zinc phosphate two-component primer, two coats of finish with standard gray two-component (S). RAL colors on request.

ALUMINIUM

Pickling and washing with water demineralized, nanotechnological process, drying at 160°C. Polyester powder primer coat and oven curing at 200°C. Finishing coat with two-component varnish