

LPC 010 POLE - TECHNICAL DATA

1:25 SCALE

DESCRIPTION

STRUCTURE

S235JR steel pole (UNI EN 10025),
Ø102 mm hot-dip galvanized according to
standards (UNI EN ISO 1461).

Optional cast aluminum base.
(UNI EN 1706) Ø360 mm.

Cast aluminum fitting
(UNI EN 1706) Ø102-60 mm.

Threaded ¾ end sleeve in steel
cold-dip galvanized.

Die-cast aluminum hatch.

Stainless steel hardware.

For details of ground anchorage, refer to the
technical drawing.


PAINTING CYCLE

STEEL

Coat of two-component zinc phosphate
primer and two coats of finish with two-com-
ponent standard gray (S) paint. RAL colors on
request.

ALUMINIUM

Pickling and washing with water
demineralized, nanotechnological process,
drying at 160°C. Polyester powder primer
coat and oven curing at 200°C.
Finishing coat with two-component varnish
standard gray color (S).
RAL colors on request.

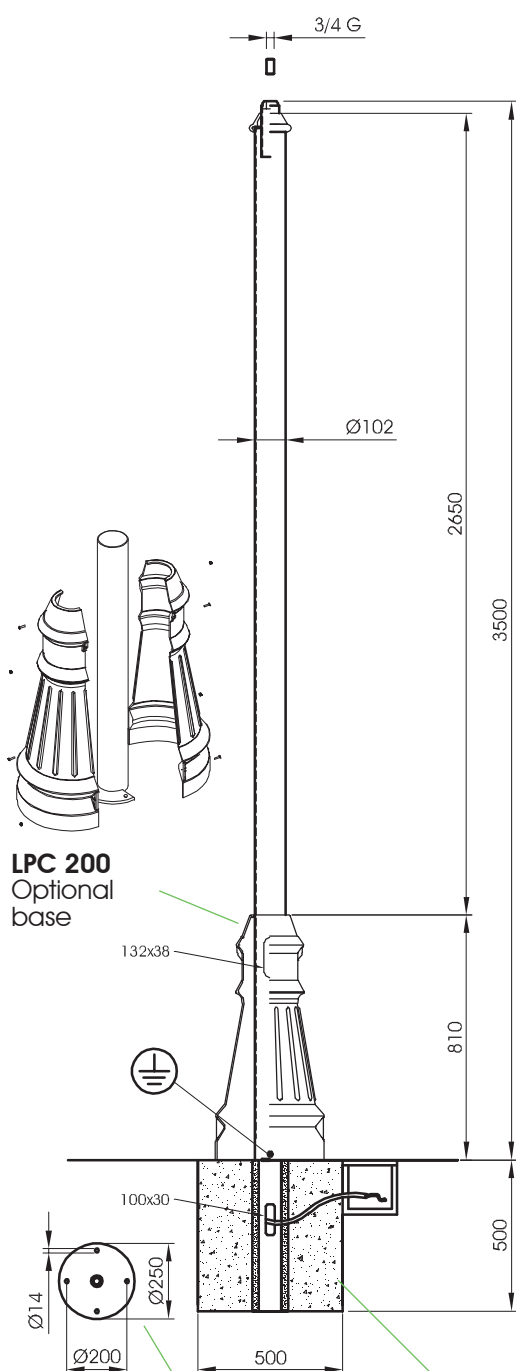

LPC 010 F
Pole with **Flange**

LPC 010 M
Pole with **Masonry**