


LPR 010 POLE - TECHNICAL DATA

1:20 SCALE

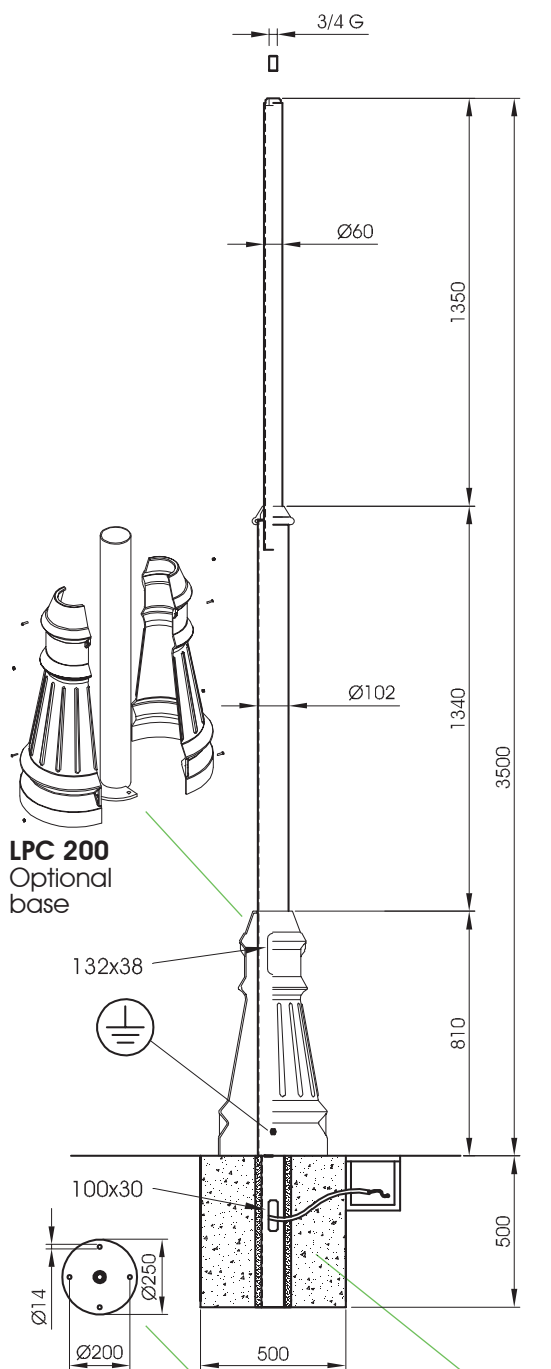

LPC 200
Optional
base

LPR 010 F
Pole with **Flange**

LPR 010 M
Palo con **Masonry**



DESCRIPTION

STRUCTURE

Tapered steel S235JR pole.
(UNI EN 10025) Ø102-60 mm.

Optional cast aluminum base
(UNI EN 1706) Ø360 mm.

Cast aluminum fitting
(UNI EN 1706) Ø102-60 mm.

Threaded ¾ end sleeve in steel
cold-dip galvanized.

Die-cast aluminum hatch.

Stainless steel hardware.

For details on the two types of ground anchorage, refer to the technical drawing.

PAINTING CYCLE

STEEL

Coat of two-component zinc phosphate primer and two coats of finish with two-component standard gray (S) paint. RAL colors on request.

CAST IRON

Sandblasting, immersion coat of zinc monocomponent, two-component zinc phosphate primer coat, two coats of finishing with standard gray two-component (S). RAL colors on request.

ALUMINIUM

Pickling and washing with water demineralized, nanotechnological process, drying at 160°C. Polyester powder primer coat and oven curing at 200°C. Finishing coat with two-component varnish standard gray color (S). RAL colors on request.