


## BC 02

Top post for vertical (**V**) or lateral (**L**) fixing, provided with upper M8 and lower M22 threaded holes. Surface protection: sandblasting, one component zinc coat by immersion, two-component zinc phosphate primer coat, two bicomponent finishing standard gray paint (**S**) or with RAL colors on request.

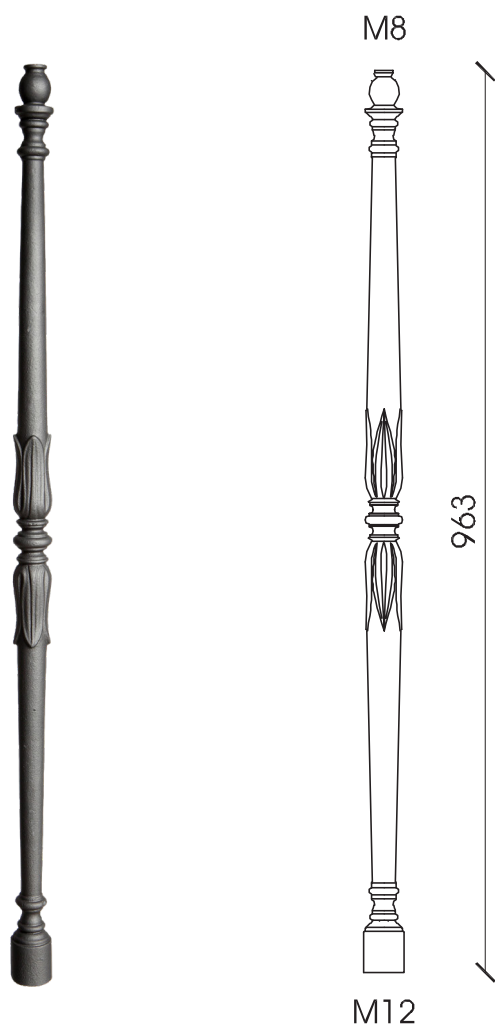

### BC 02 VS


Vertical fixing top post

**MATERIAL**

Cast iron casting GLJ-200 (UNI EN 1561)

**WEIGHT**

Kg. 5

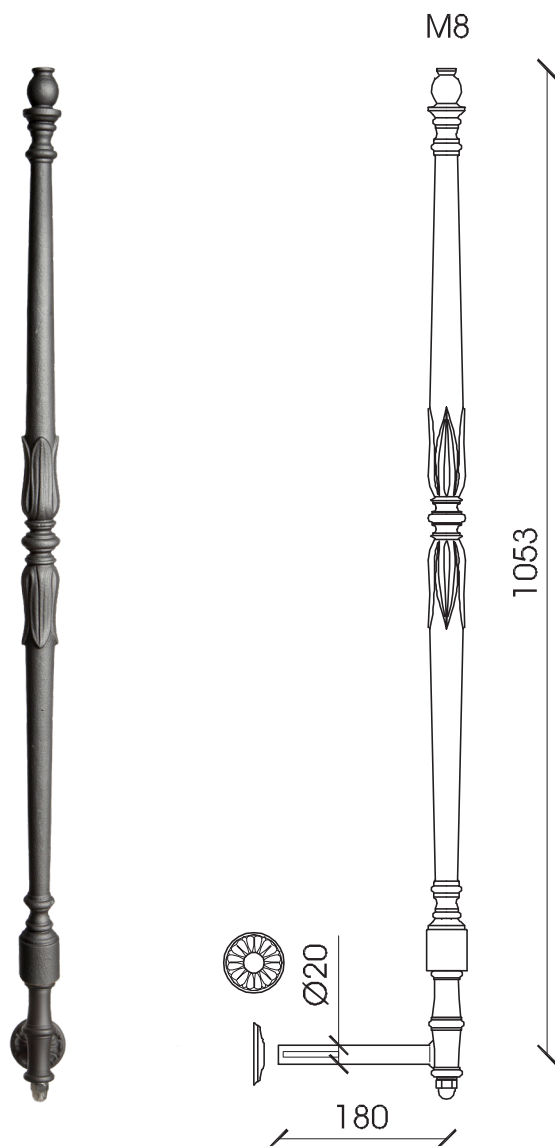

### BC 02 LS

Lateral fixing top post

**MATERIAL**

Cast iron casting GLJ-200 (UNI EN 1561)

Spheroidal cast iron lateral fixing GJS-400 (UNI EN 1563)


Cover for hole made in cast aluminium

**WEIGHT**

Kg. 5,7


## INSTALLATION EXAMPLES

**BC 02 V**

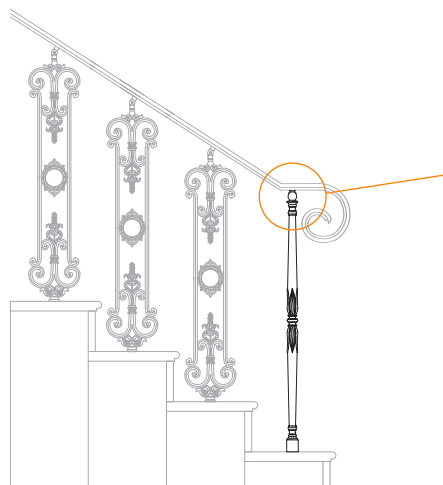

**FIXING ON  
HANDRAIL**

**BC 02 L**

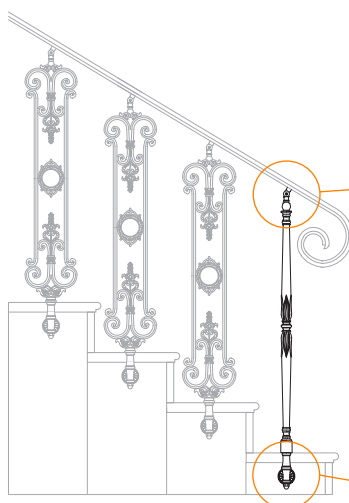


**BA 01 VS**

**BA 02 LS**

**BA 05 VS**

**SPACER K**

**BA 03 VS**

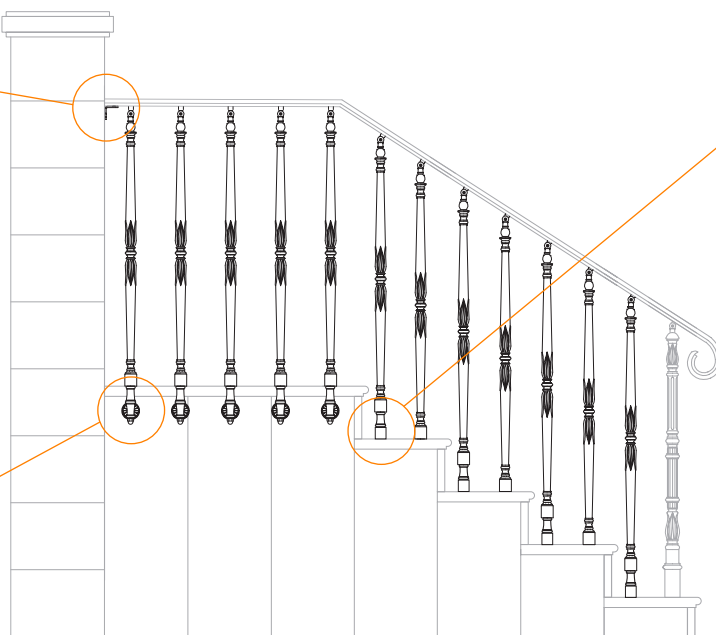

**RAILING WITH COLUMN BC 02**

## ACCESSORIES



**BA 01 VS  
UPPER FIXING**



**BA 05 VS  
WALL FIXING**



**SPACER K  
SPECIAL ACCESSORY**



**BA 02 LS  
LATERAL FIXING**



**BA 03 LS  
COVER FOR HOLE  
ROSETTE**