

LPA 009 ALUMINIUM POLE

1:25 SCALE

DESCRIPTION

STRUCTURE

Alloy aluminum EN AW 6060 pole equipped with hatch for wiring compartment.

Aluminum EN AW 5754 base
224/180/8 mm.

114/60 mm pole body.

Stainless steel hardware.


FINISHING

Aluminum grinding, protection option with elastomer in the same color as the pole up to the height of 350 mm.
(another height at customer's request).

For details on the two types of ground anchoring, refer to the technical drawing.

ANODIZING PROCESS

Anodizing in 10 colors with the possibility of brightening consisting of the formation of an oxide layer on the surface of the metal by means of electrochemical method.

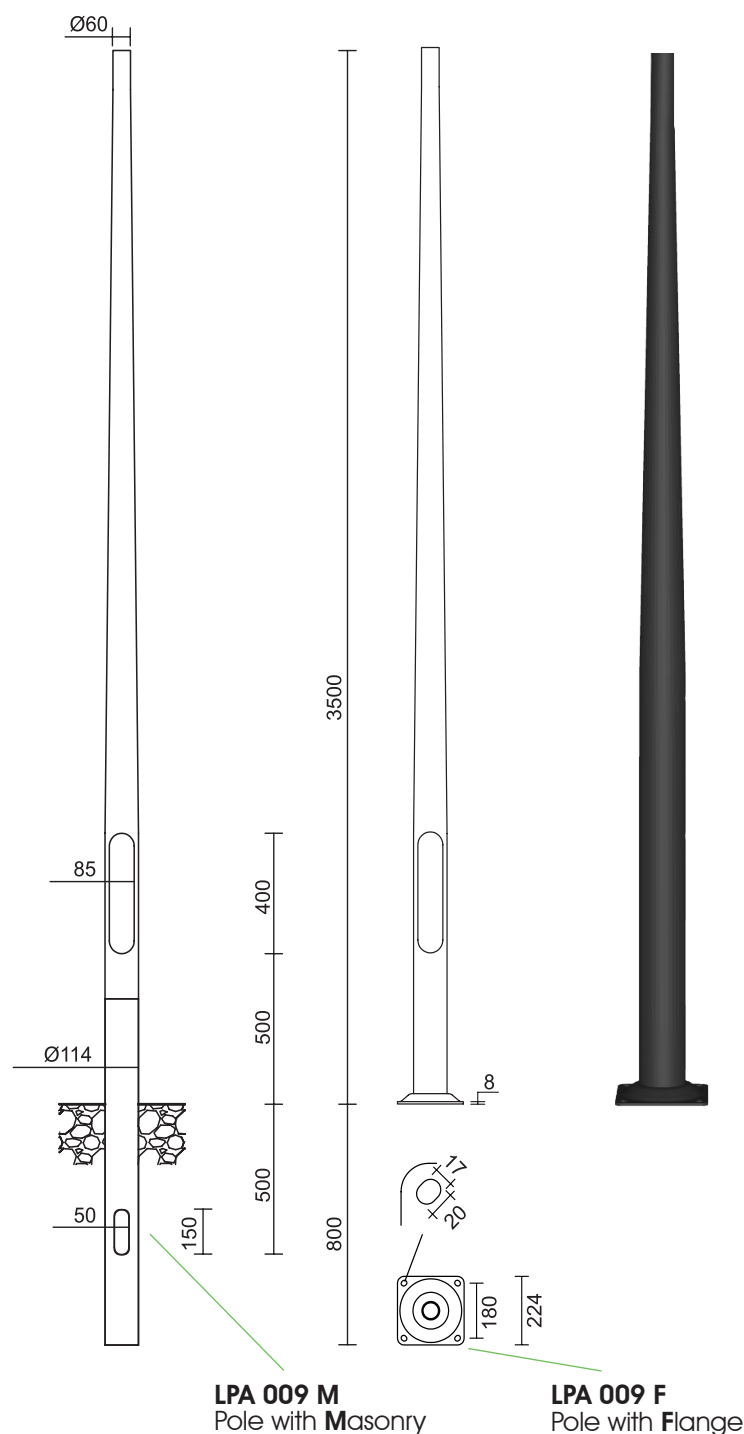

TECHNICAL DATA

HEIGHT m	THICKNESS mm	WEIGHT Kg	BASE mm	TOP' mm	FLANGE mm	FOUNDATION/ ARMATURE CAGE
3	3	9,8X11,3	114	60	224x224	LFB500 / LFZ500




PASSIVE SECURITY | Class 100NE2

No Resistance




FLANGE DETAIL

OPTIONAL for POLE WITH FLANGE

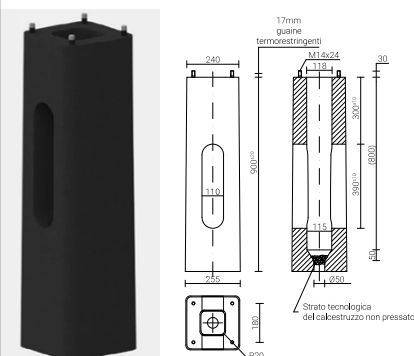

LFB 500 FOUNDATION

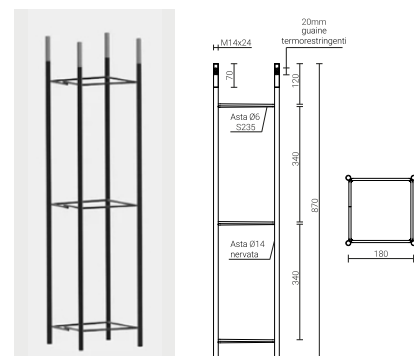

ARMATURE CAGE LFZ 500

ANODIZING CODES



C35

BLACK



C175

GREEN



C163

GREY



C165

GRAPHITE



C34

BROWN



C178

ANTHRACITE



C33

OLIVE



C32

CHAMPAGNE



C45

INOX



C0

NATURAL