


## BC 11

Stake with vertical attachment, provided with M24 bottom hole.  
 Surface protection by sandblasting, immersion coat of one-component zinc, coat of two-component zinc phosphate primer, two coats of finish with paint two-component gray standard, or with RAL colors upon request.

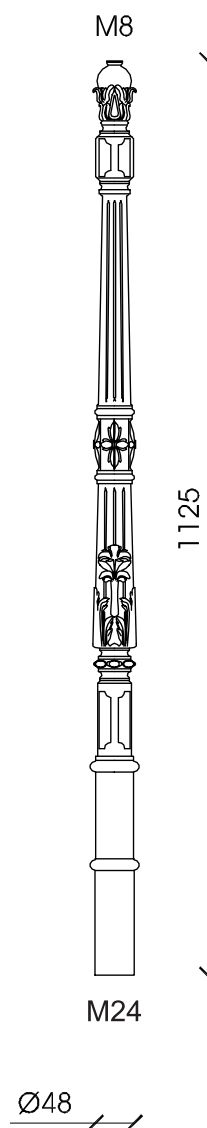

Vertical-attached stake

**MATERIAL**

Cast iron casting GLJ-200 (UNI EN 1561)

**WEIGHT**

Kg. 11,7

## INSTALLATION EXAMPLES

