


BC 12

Stake with vertical attachment, provided with M24 bottom hole.
 Surface protection by sandblasting, immersion coat of one-component zinc, coat of two-component zinc phosphate primer, two coats of finish with paint two-component gray standard, or with RAL colors upon request.

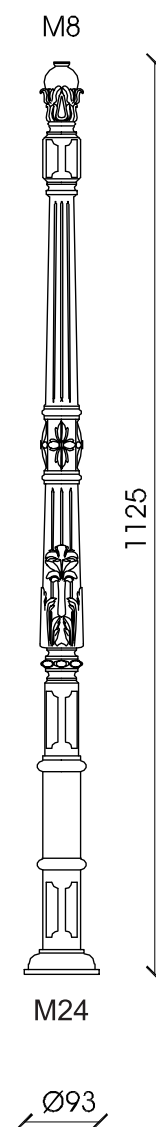

Vertical-attached stake

MATERIAL

Cast iron casting GLJ-200 (UNI EN 1561)

WEIGHT

Kg. 12,4

INSTALLATION EXAMPLES

